

Jörg U-Brake 8202

W. NEAL SERVICES LTD
 29 Purdeys Way
 Purdeys Industrial Estate
 Rochford
 Essex
 SS4 1ND
 ENGLAND




Optional:
 Custom made



The U-Brake is safe without any light guarding because of the small stroke of the upper beam. This makes the U-Brake very accessible and fast.

Heavy Construction
 Heavy linear bearings
 Standard tooling
 Produced in Holland

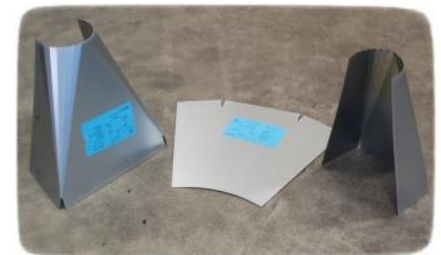

Innovative press brake for easy and quick bending of Square to Round Duct Fittings. Because of the C frame construction the work pieces can be put into the machine from 3 sides.

Quick and safe operation

Because of a small opening of the tools (max 5 mm) the U-Brake does not need any safety guard to be safe. With this small stroke, it takes less than 1 sec. to make one bend! The bending angle is easily adjusted by a mechanical stop.

Fittings

The Easy Brake has been designed to bend HVAC fittings square to round. Other use is also possible.

[See the video: http://www.youtube.com/watch?v=bvgvLQQrBj0](http://www.youtube.com/watch?v=bvgvLQQrBj0)



SPECIFICATIONS									
Model	Drive	Capacity	Power	Working Length	Working Height	Length	Width	Height	Weight
8202	Hydraulic	8 Ton	400V 3F+0+E	1000mm	1000mm	2180mm	1015mm	1970mm	1250Kg

Last revision: 18/11/11